
DIRECT DRAW BEER COOLERS

E)	65	10	
1	1	1	
ί.	2.1		
	-		

FDD SERIES




Standard Features

- Refrigeration system is a free flowing air throughout the box to ensure "ICE COLD" products at all times.
- Heavy duty18 gauge stainless steel top.
- 3" diameter polished stainless steel draft tower with more taps per tower standard than our competition.
- 59" & 69" units come standard with (1) three way gas valve, 79" & 95" units comes standard with (1) 4 way Gas Valve.
- Stylish wear resistant black painted steel finish front, sides and back.
- S models with stainless steel front, side and back.
- Durable stainless steel floor and bottom door frame. Added protection with a **heavy duty stainless steel removable false floor** which creates a flush opening for easy placement of your kegs.
- Slide out compressor for ease of serviceability.
- Flush cabinets to allow side by side installations.
- Analog thermostat.
- Fluorescent interior light (except FDD-24).
- FDD-24(S) single keg units are rear breathing with internal drain, internal CO2 chain harness and with knockout plate for external CO2 placement, standard with casters.

Options and Accessories

- □ 4" casters (except FDD-24)
- □ 6" Adjustable stainless steel legs (except FDD-24)
- □ 220v/50cycles/1phase

DIRECT DRAW BEER DISPENSERS

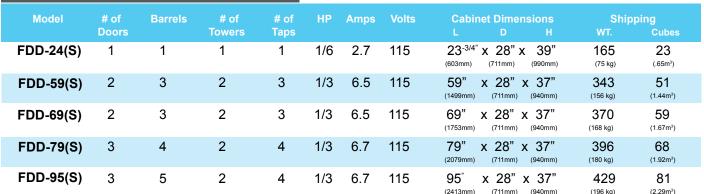



Fagor Commercial, Inc. 12800 N.W. 38th Avenue Miami, Fl. 33054-4525 USA Ph: (305) 779-0170 • Fax: (305) 779-0173



1-866- GO FAGOR

www.fagorcommercial.com




FDD-95 Showr

FDD-59S Shown

Conforms to UL and NSF Standards

FDD SERIES

DIRECT DRAW **BEER COOLERS**

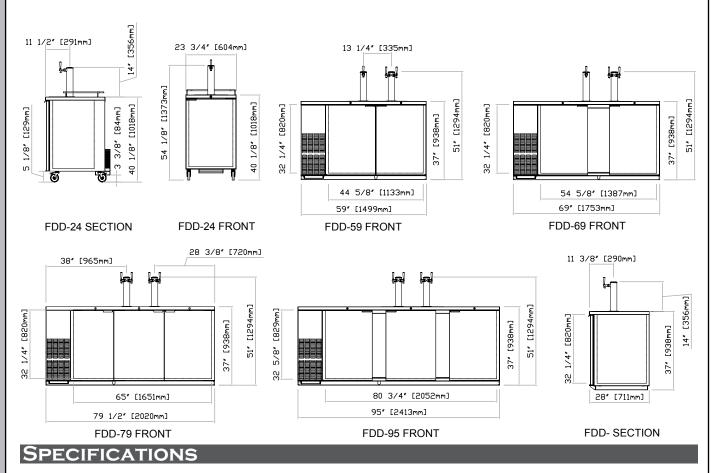

Construction: Heavy duty stainless steel top, 18 gauge. Painted black front, sides and back. (S) Model's have stainless steel front, sides and back. Interior constructed of heavy duty galvanized steel walls with coved corner stainless steel floor. has a reinforced and re-Floor movable false beveled panel for added protection. No gap inbetween equipment for side by side installation.

Door is comprised of a heavy duty black painted steel. (S) Models are stainless steel. Provided with locks per door, magnetic door gaskets, removable without tools. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 1-1/2" CFC-Free polyurethane insulation, foamed in place.



Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing compressor on left side.

Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for greater air flow. Automatic condensate evaporator, no drain connection required: evaporator condensate has been plumbed to a condensate pan located in the compressor housing.

Rear drain connection for the drip pan located in the rear of the compressor housing.

3" diameter polished stainless steel draft towers cooled by continuous cold air circulation. Channel air distribution system.

Access for the condensing unit behind the front grill, slides out for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.

Lights: Interior fluorescent light (except FDD-24).

Others: Unit is supplied standard with a 8' cord and plug (Nema 5-15p).

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. & Canada only).

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 08/09

12800 N.W. 38th Avenue Miami, Fl. 33054-4525 USA Ph: (305) 779-0170 • Fax: (305) 779-0173