

SOLID DOOR REACH-IN REFRIGERATORS / FREEZERS



Project _____
 Location _____
 Item # _____
 Qty _____

Q SERIES

Models: QR-1 QF-1
 QR-2 QF-2

Standard Features

- Stylish **European design** with **American durability**.
- 22 gauge stainless steel door with rounded corners; interior step design for added insulation and protection of door gasket.
- All stainless steel interior and exterior construction for a cleaner & safer food environment.
- Accepts all basic pan sizes including 18" x 26" bun pans.
- Bottom mount refrigeration system with a service friendly rail system
- Storage space available on top of unit.
- Self closing doors with 90° stay open feature for convenient loading and unloading.
- Refrigerators maintain product temperatures from 33° to 38°F / freezers: -10°F (QF-1), -5°F (QF-2), includes automatic defrost.
- Standard with 4" casters, front 2 with brakes.



QR-1 Shown



QR-2 Shown

Options and Accessories

- 6" adjustable legs (set of 4)
- Epoxy coated shelves (clips included)
- Factory reverse hinging
- Bun tray rack - Full door
- Bun tray rack - Half door
- Stainless steel back panel
- 220 volts / 50 cycles / 1 phase



REFRIGERATOR

Model	# of Doors	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H*	WT.	Cubes
QR-1	1	23 <small>(651 litres)</small>	3	6.3	1/3	115/60/1	5-15P	10' <small>(3.048mm)</small>	28" <small>(711mm)</small>	x 31-1/2" <small>(800mm)</small>	x 78-7/8" <small>(1978mm)</small>	295 <small>(134kg)</small>	51 <small>(1.44m³)</small>
QR-2	2	49 <small>(1388 litres)</small>	6	6.7	1/2	115/60/1	5-15P	10' <small>(3.048mm)</small>	55-1/4" <small>(1.708mm)</small>	x 31-1/2" <small>(800mm)</small>	x 78-7/8" <small>(1978mm)</small>	475 <small>(222.1 kg)</small>	95 <small>(1.44m³)</small>

FREEZER

Model	# of Doors	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H*	WT.	Cubes
QF-1	1	23 <small>(651 litres)</small>	3	7.6	1/2	115/60/1	5-15P	10' <small>(3.048mm)</small>	28" <small>(711mm)</small>	x 31-1/2" <small>(800mm)</small>	x 78-7/8" <small>(1978mm)</small>	295 <small>(134kg)</small>	51 <small>(1.44m³)</small>
QF-2	2	49 <small>(1388 litres)</small>	6	10.5	1	115/60/1	5-15P	10' <small>(3.048mm)</small>	55-1/4" <small>(1.708mm)</small>	x 31-1/2" <small>(800mm)</small>	x 78-7/8" <small>(1978mm)</small>	475 <small>(222.1 kg)</small>	95 <small>(1.44m³)</small>

* Height does not include 4" casters or 6" optional legs



Fagor Commercial, Inc.
 12800 N.W. 38th Avenue
 Miami, Fl. 33054-4525 USA
 Ph: (305) 779-0170 • Fax: (305) 779-0173




1-866- GO FAGOR


www.fagorcommercial.com

Q SERIES


SOLID DOOR REACH-IN REFRIGERATORS/FREEZERS

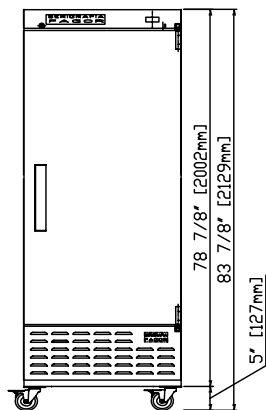


QR-1 TOP

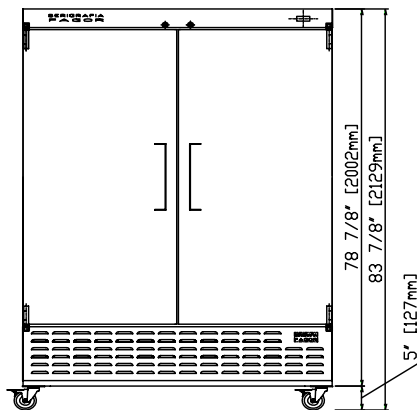


QR-2 TOP

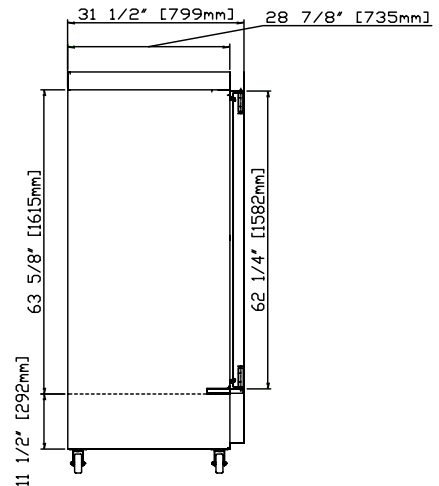

QR-2 SECTION



QR-1 FRONT

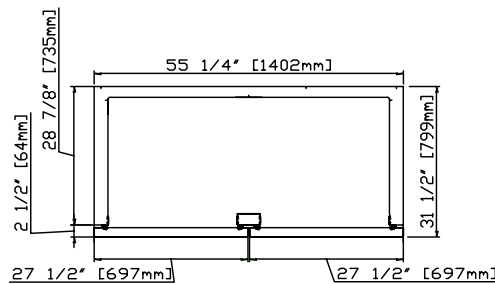

QR-2 FRONT

SPECIFICATIONS

Construction: Heavy duty stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor.

Door is completely stainless steel interior and exterior, step design with hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self closing and with 90° stay open feature. Recessed door handle. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2-3/8" CFC-Free polyurethane insulation, foamed in place. Three adjustable epoxy coated shelves provided per section.

Interior incandescent light with safety shield per section outside the food zone and activated by door rocker switch.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Coated evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38° F and freezers 0° F to -10° F (QF-1), 0° F to -5° F (QF-2) during normal operations.

Digital display thermometers and analog controllers on refrigerated units. Digital display and controllers on freezers. Automatic defrost, time initiated.

Other: Unit is supplied standard with a 10' cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. & Canada only).



Fagor Commercial, Inc.

12800 N.W. 38th Avenue
Miami, Fl. 33054-4525 USA

Ph: (305) 779-0170 • Fax: (305) 779-0173

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice.
Printed in the USA • 08/09