

UNDERCOUNTER REFRIGERATORS / FREEZERS

Project _____
 Location _____
 Item # _____
 Qty _____

FUR / FUF SERIES

- Models:** FUR-27 FUF-27
 FUR-48 FUF-48
 FUR-60 FUF-60
 FUR-72

Standard Features

- Stylish "European Design" with "American Durability"
- 22 gauge heavy duty stainless steel doors with rounded corners and durable stainless steel hinges gives you the combination necessary to protect your long term investment.
- All stainless steel construction exterior and interior provides a cleaner and safer food environment.
- Front breathing refrigeration system for built in applications.
- **Optional: 2-1/2" casters to allow unit to be placed underneath a cabinet.**
- The Refrigerator maintains product temperature s from 33° to 38°F / Freezers -7°F to properly preserve your food.
- Standard with 4" casters, front 2 with brakes.



FUR-60 Shown

Options and Accessories

- 6" adjustable legs (set of 4)
- 2-1/2 casters (set of 4, front 2 w/ brakes)
- Epoxy coated shelves (clips included)
- 16 gauge S/S top in lieu of std.
- Stainless steel back panel
- Single tier overshelf
- Double tier overshelf
- 220 volts / 50 cycles / 1 phase



Conforms to UL and NSF-7 standards

REFRIGERATOR

Model	Doors	Capacity (Cu. Ft.)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H	Wt.	Cubes
FUR-27	1	6.1 <small>(173 litres)</small>	2	5.1	1/3	115/60/1	5-15P	8' <small>(2,439 mm)</small>	27" x 30" x 36" <small>(686 mm) (762 mm) (914 mm)</small>	204 <small>(93 kg)</small>	21 <small>(.60 m3)</small>		
FUR-48	2	11.8 <small>(334 litres)</small>	4	6.0	1/3	115/60/1	5-15P	8' <small>(2,439 mm)</small>	48" x 30" x 36" <small>(1,219 mm) (762 mm) (914 mm)</small>	289 <small>(131 kg)</small>	35 <small>(.99 m3)</small>		
FUR-60	2	15.0 <small>(425 litres)</small>	4	7.3	1/2	115/60/1	5-15P	8' <small>(2,439 mm)</small>	60" x 30" x 36" <small>(1,524 mm) (762 mm) (914 mm)</small>	343 <small>(156 kg)</small>	47 <small>(1.33 m3)</small>		
FUR-72	3	18.2 <small>(515 litres)</small>	6	8.0	1/2	115/60/1	5-15P	8' <small>(2,439 mm)</small>	72" x 30" x 36" <small>(1,829 mm) (762 mm) (914 mm)</small>	413 <small>(188 kg)</small>	56 <small>(1.59 m3)</small>		

FREEZER

Model	Doors	Capacity (Cu. Ft.)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H	Wt.	Cubes
FUF-27	1	6.1 <small>(173 litres)</small>	2	7.8	1/2	115/60/1	5-15P	8' <small>(2,439 mm)</small>	27" x 30" x 36" <small>(686 mm) (762 mm) (914 mm)</small>	204 <small>(93 kg)</small>	21 <small>(.60 m3)</small>		
FUF-48	2	11.8 <small>(334 litres)</small>	4	7.9	1/2	115/60/1	5-15P	8' <small>(2,439 mm)</small>	48" x 30" x 36" <small>(1,219 mm) (762 mm) (914 mm)</small>	289 <small>(131 kg)</small>	35 <small>(.99 m3)</small>		
FUF-60	2	15.0 <small>(425 litres)</small>	4	8.1	1/2	115/60/1	5-15P	8' <small>(2,439 mm)</small>	60" x 30" x 36" <small>(1,524 mm) (762 mm) (914 mm)</small>	343 <small>(156 kg)</small>	47 <small>(1.33 m3)</small>		



Fagor Commercial, Inc.
 12800 N.W. 38th Avenue, USA
 Miami, FL 33054-4525
 Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173




1-866- GO FAGOR


www.fagorcommercial.com

FUR / FUF SERIES


UNDERCOUNTER REFRIGERATORS / FREEZERS




Elevation

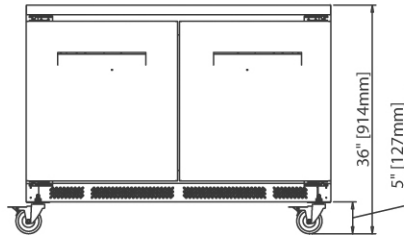


Elevation

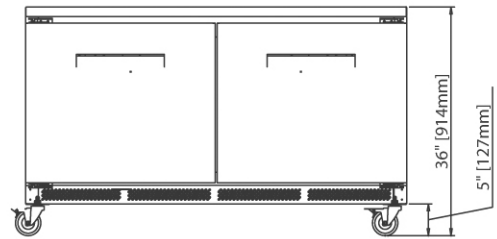


Elevation




Plan View

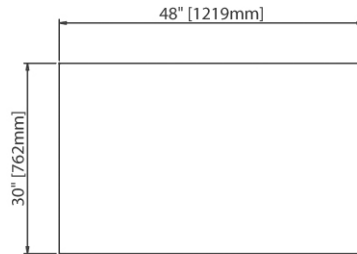


Plan View

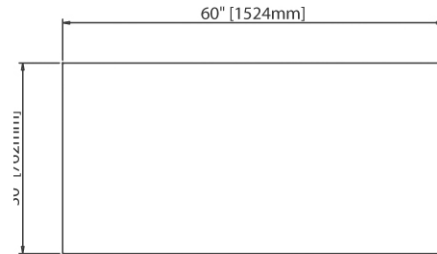

Plan View

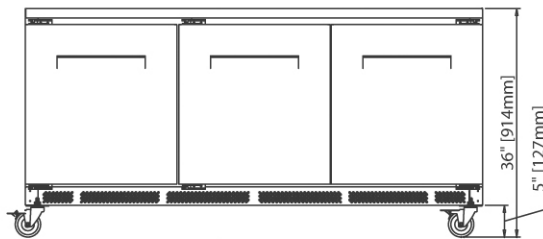

Elevation

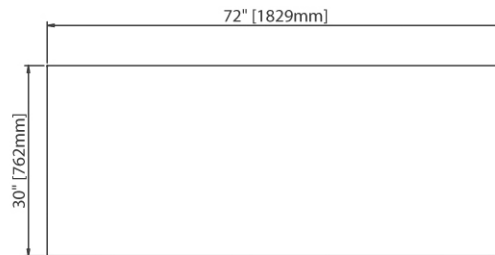

Plan View

SPECIFICATIONS

Construction: Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor.

Door is completely stainless steel interior and exterior with hinged solid doors and positive seal. Magnetic door gaskets removable without tools, self closing with 120° stay open feature. Recessed door handle. Door heaters provided on all undercounters, (1) Set on Refrigerated units and (2) sets on Freezers. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2" CFC-Free polyurethane insulation, foamed in place. Two adjustable epoxy coated shelves provided per section.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a Refrigerator / R-404a Freezers) Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and Freezers between 0° F to -7° F during normal operations.

Others: Unit is supplied standard with an 8 cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. only).



Fagor Commercial, Inc.

12800 N.W. 38th Avenue, USA

Miami, FL 33054-4525

Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 01/07